



PR-4120 / PR-4240


4-channel 100V power amplifier

This power amplifier will supply plenty of power to your zones, enabling you to supply a maximum of four zones with 120W or 240W. You can control the amplification separately for each zone or channel.

- 4 x 120W / 4 x 240W output capacity (RMS)
- balanced inputs via XLR
- 70V/100V/4-16 Ω output
- limiter to prevent over-voltage and short-circuiting of the loudspeaker
- limiter to prevent power surges
- automatic ventilator with variable speed thanks to thermal sensor
- 2 RS/3RS

SPECIFICATIONS	PR-4120	PR-4240
output power 100V	4 x 120W	4 x 240W
output power RMS 8 Ω	monitor	
frequency range	50Hz - 16kHz	
zones	4	
direct output	70V / 100V / 4 Ω	
LED level indicator	yes	
power supply	240 V AC	
power consumption	720W	1500W
dimensions (h x w x d)	88 x 484 x 353mm	132 x 484 x 353mm
weight	22kg	30.9kg

PR-4120

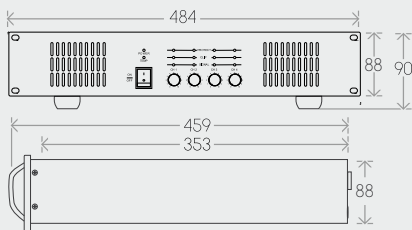

PR-4240

